

## South


Design Konstantin Grcic, 2023

### Low bench, suitable for outdoor.

In steel tube and steel wire, cataphoretically treated and painted in polyester powder.

Pivoting feet.

Available also woven matting.

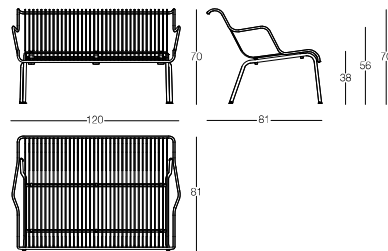

9401.79.00



0,780 m<sup>3</sup>




19,30 kg

### Art. nr. Low bench in steel tube and wire

SD2980 colours

### Woven matting, suitable for outdoor.

In 100% polyolefin.



5609.00.00

0,011 m<sup>3</sup>



4,545 kg



### Art. nr. Woven matting

AC906 colours

#### Steel tube and wire

-  orange 5279
-  bordeaux 5280
-  light blue 5276
-  night blue 5282

#### Woven matting

-  red/orange
-  blue/light blue

#### Test

Leg sideways static load test EN 1728:2012+AC:2013, L1  
Leg forward static load test EN 1728:2012+AC:2013, L1  
Seat and back static load test EN 1728:2012+AC:2013, L1  
Arm sideways static load test EN 1728:2012+AC:2013, L1  
Vertical load on back rest EN 1728:2012+AC:2013, L1  
Arm downwards static load test EN 1728:2012+AC:2013, L1  
Seat and back fatigue test EN 1728:2012+AC:2013, L1  
Seat front edge durability test EN 1728:2012+AC:2013, L1  
Arm fatigue test EN 1728:2012+AC:2013, L1

Seat impact test EN 1728:2012+AC:2013, L1  
Back impact test EN 1728:2012+AC:2013, L1  
Arm rest impact test EN 1728:2012+AC:2013, L1  
Stability EN 1022:2005  
Stability EN 1022:2018  
Safety requirements EN 16139:2013  
Information for use EN 16139:2013



STANDARD  
100

084987.0  
CENTROCGT